


Large Super-TF Bearings

A revolutionary combination of longer service life and superior resistance against wear, seizure and heat.



Outstanding toughness, performance and economy — NSK technology sets a new standard for long service life

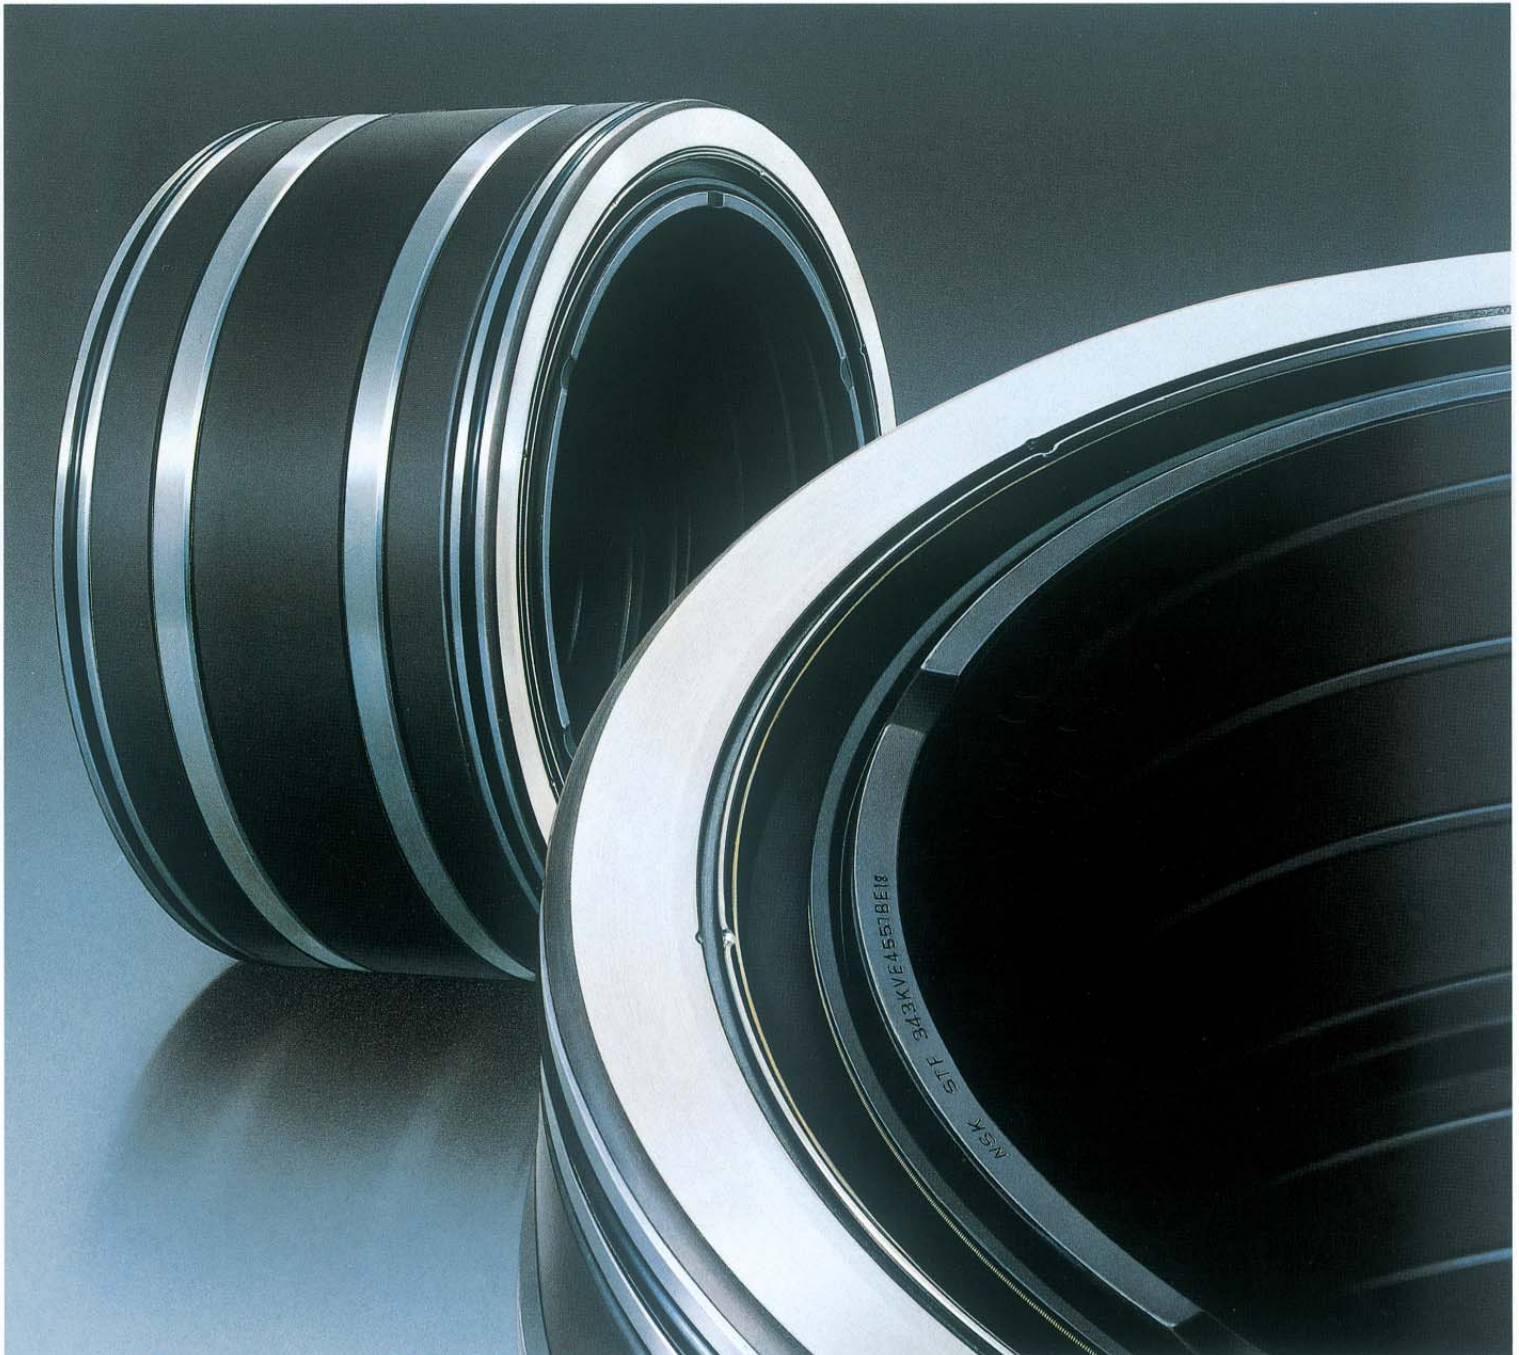

Outstanding Performance

NSK's Large Super-TF Bearings have been especially designed for outstanding toughness under harsh conditions of use, where they surpass even NSK's TF Bearings. Incorporating new materials and new heat treatment technology, they combine long service life under contaminated lubrication with good resistance to wear, seizure and heat. In comparison with bearings made of conventional materials, Super-TF Bearings offer

- 10 times the service life with contaminated lubrication,
- twice the service life under clean lubrication,
- less than one-third the rate of wear and a 40% improvement in seizure resistance,
- dimensional stability superior to that of JIS (Japanese Industrial Standards) SUJ2 bearing steel or ASTM 52100 bearing steel, and
- improved heat resistance, giving 4 times the service life at 160°C.


Applications of Large Super-TF Bearings

Large Super-TF Bearings are ideally suited to a wide range of applications requiring long service life under contaminated lubrication conditions. Super-TF technology can be applied to a wide range of bearing types, including cylindrical and tapered roller bearings, spherical roller bearings, deep-groove ball bearings, and angular-contact ball bearings. One representative application is four-row tapered roller bearings for roll-neck bearings in steel or aluminum rolling mills, where they are subject to scale entry and heavy loads.

Large Super-TF Bearings and TF Technology

In its quest for longer bearing service life, NSK has spent many years analyzing the mechanisms of fatigue in bearings under various conditions, and researching and developing materials and heat treatment processes. The range of approaches to achieving longer service life taken by our research team are shown in Fig. 1. The technology incorporated in our Large Super-TF Bearings is designed to maximize service life under conditions where bearings are subject to surface-originating flaking.

Fig. 1 Approaches to achieving longer service life in bearings

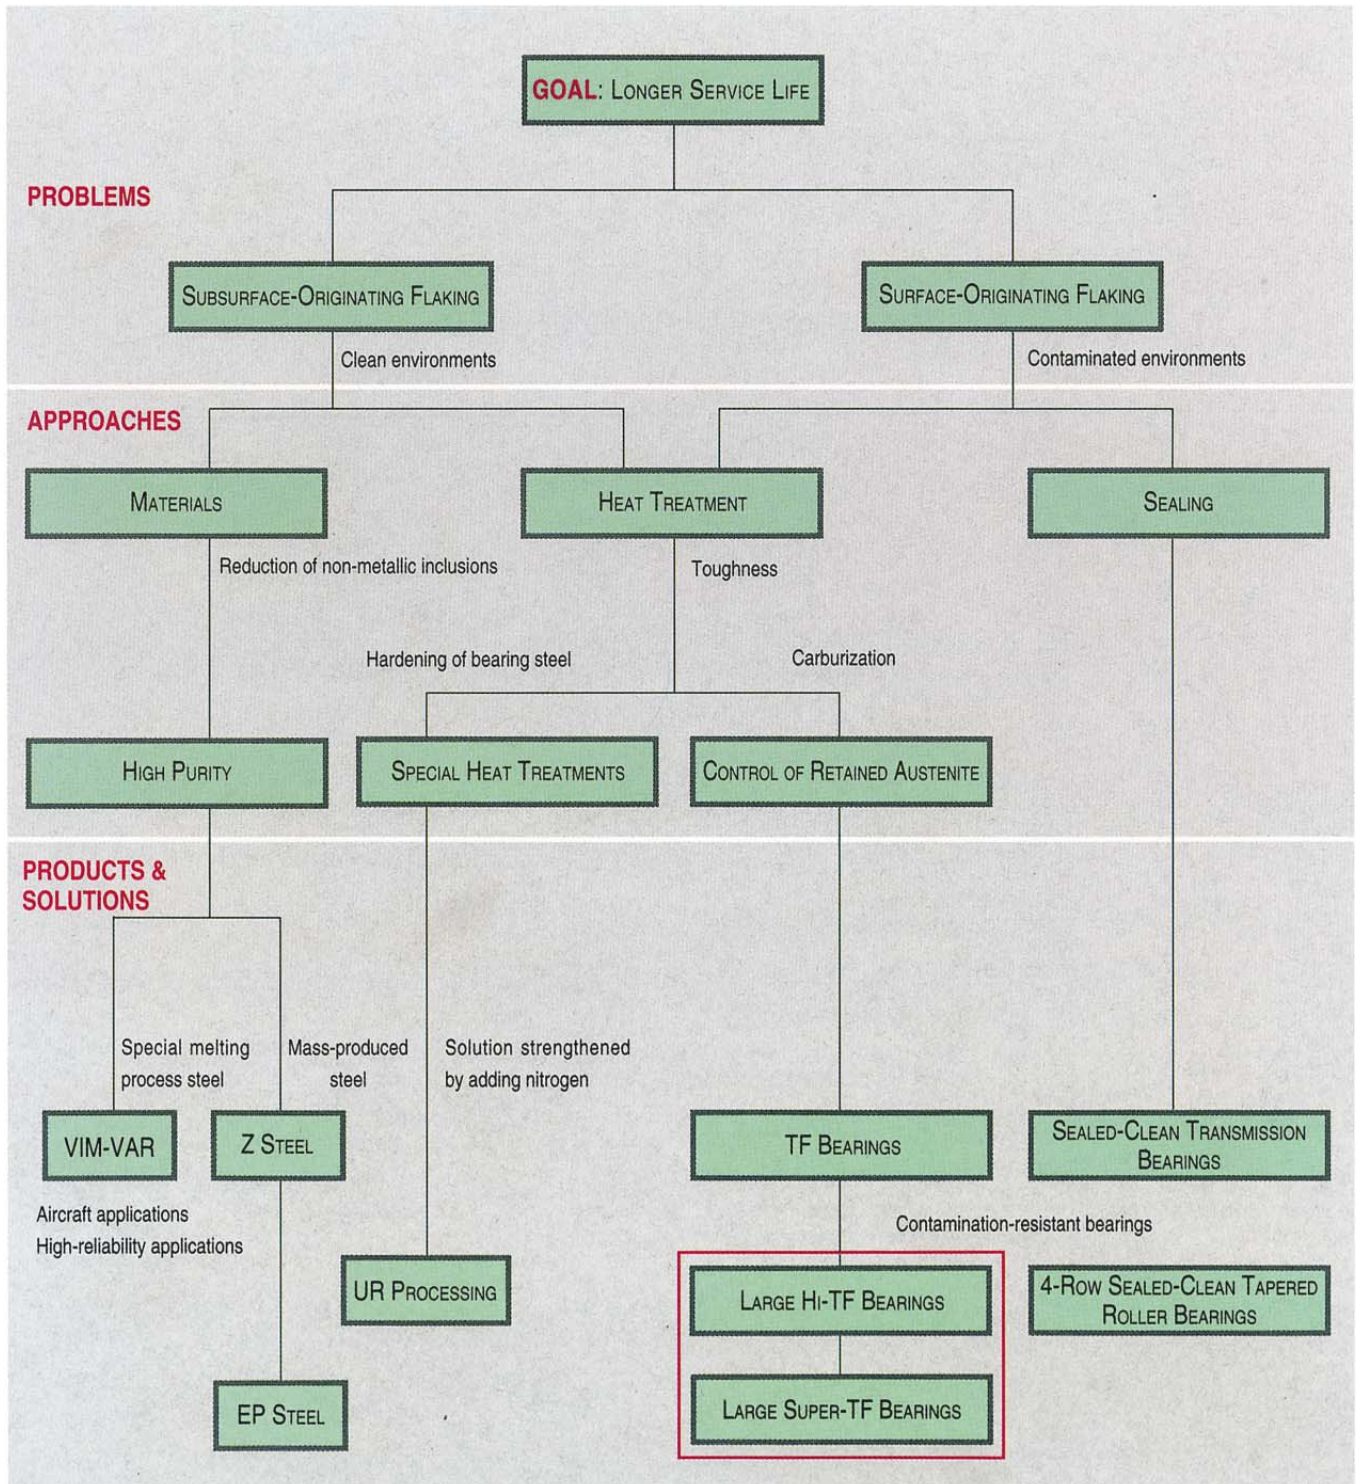

The Development of Super-TF Bearings

The problem: Contaminated lubrication conditions

Bearings may be required to operate under clean or dirty conditions; under dirty conditions their lubricating oil is easily contaminated. Metal particles or casting sand in the lubricating oil make dents in the contact surfaces. As shown in Fig. 2, stress is concentrated around these dents and eventually leads to cracking and to surface-originating flaking. The concentration of stress around a dent is expressed by the equation $[P/P_0 \propto (r/c)^{-0.24}]$, where "r" is the radius at the shoulder of the dent and "2c" is the shoulder-to-shoulder width of the dent. The greater the value of "r/c", the smaller the stress concentration and the longer the service life of the bearing.

The solution: TF technology

NSK is a world leader in the research and development of material properties to reduce the concentration of stress around surface dents. As shown in Fig. 3, our work has revealed that a high level of retained austenite is an extremely effective means of maximizing the r/c value around surface dents in the bearing material. TF technology is a unique heat treatment process developed by NSK to optimize the level of retained austenite in bearing materials. It is the basic technology incorporated in Super-TF Bearings and is patented in the United States of America (USP4904094) and Germany (DE3922720C2).

Material Properties of Large Super-TF Bearings

As we have seen, the approach to achieving long service life taken in NSK's Super-TF Bearings is to minimize the concentration of stress around the shoulders of surface dents. A high level of retained austenite helps to maximize the value of r/c and reduce the concentration of stress around dents. However, austenite itself has a soft structure and reduces the hardness of the bearing material. In order to meet the seemingly conflicting needs for greater hardness of the bearing material and a higher level of

Fig. 2 Concentration of stress around a surface dent


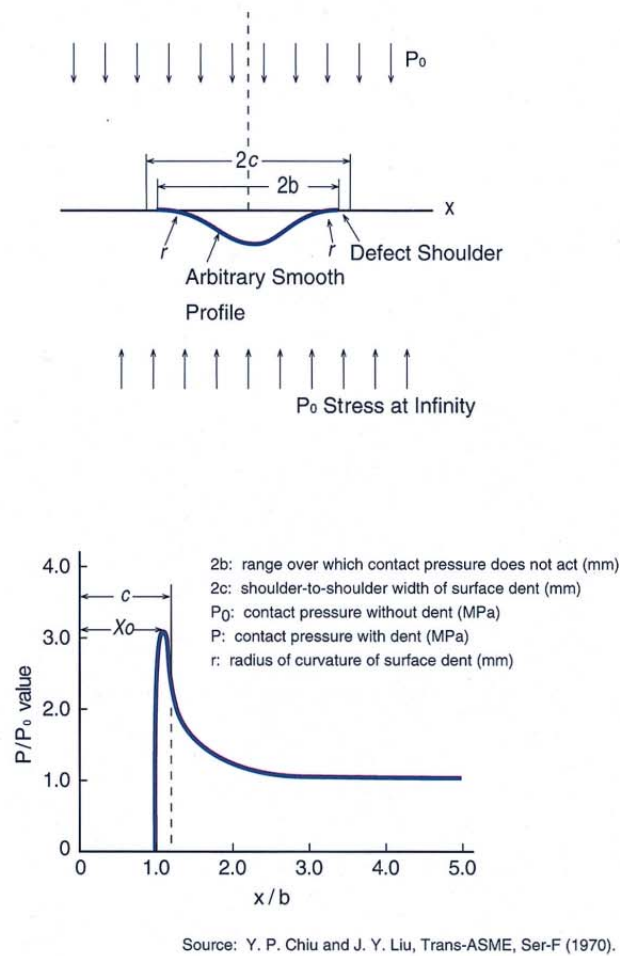


Fig. 3 Relationship of r/c value to retained austenite level

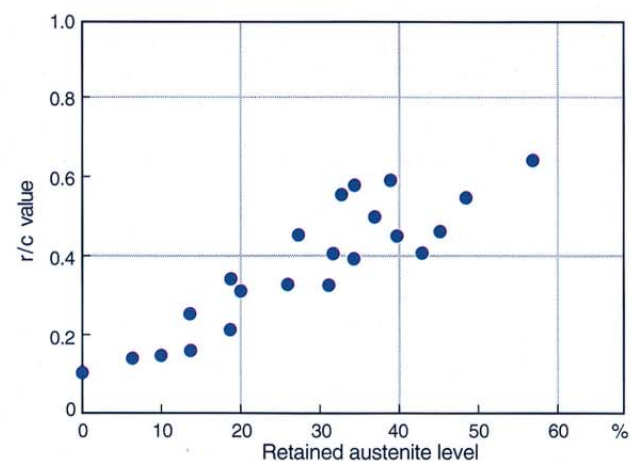

retained austenite, we decided to adopt a technique that would promote the uniform distribution and reduce the diameter of carbide and carbonitride particles in the bearing material. To this end, our researchers developed a new type of steel named SAC2, containing appropriate quantities of chrome and molybdenum, which are used in the formation of carbides and nitrides, and have developed new carburization and carbonitriding heat treatment techniques that form finer carbide and carbonitride particles. NSK holds some 10 patents regarding these techniques in Japan and overseas, including two in the United States of America, USP4871268 and USP5137375.

Fig. 4 shows the surface structure of a Large Super-TF Bearing with the even distribution of fine carbide and carbonitride particles obtained with the new material and heat treatment. For comparison, Fig. 5 shows the surface of an ordinary carburized steel bearing. Figs. 6 and 7 show the results of image analysis of Figs. 4 and 5. From Fig. 6, it is clear that the Large Super-TF Bearing has more and finer carbide and carbonitride particles. Fig. 8 shows that the formation of finer carbide and carbonitride particles gives Super-TF Bearings greater hardness and higher retained austenite levels than TF Bearings. As a result, Large Super-TF Bearings achieve a high r/c value (Fig. 9).

Figs. 4, 5 Distribution of carbides and carbonitrides in a Large Super-TF Bearing (Fig. 4) and ordinary carburized steel bearing (Fig. 5) (x4000 magnification)

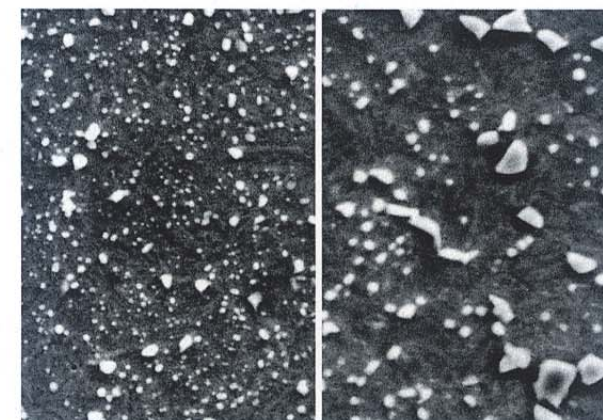


Fig. 4 Super-TF

Fig. 5 Carburized steel

Fig. 6 Average diameter of carbide and carbonitride particles in a Large Super-TF Bearing

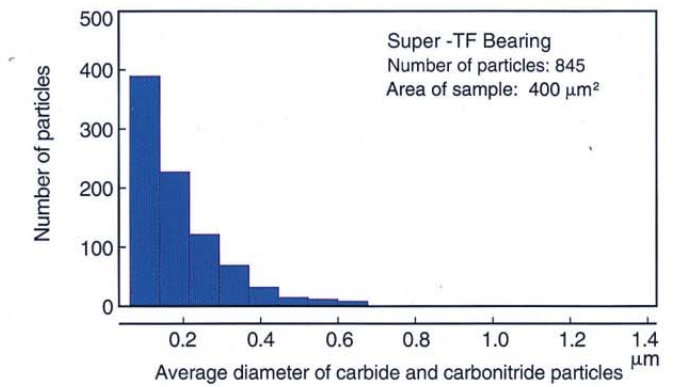


Fig. 7 Average diameter of carbide particles in an ordinary carburized steel bearing

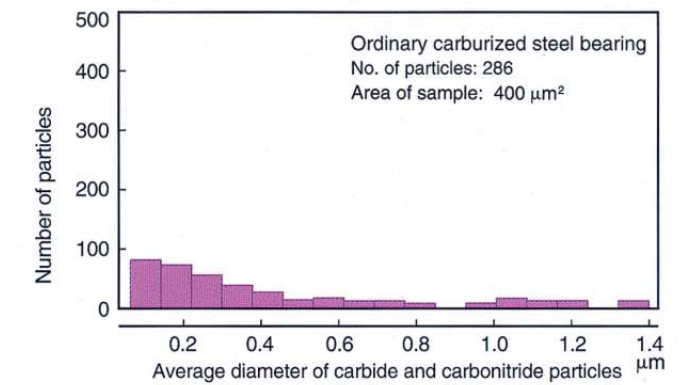


Fig. 8 Relationship of material hardness and retained austenite level


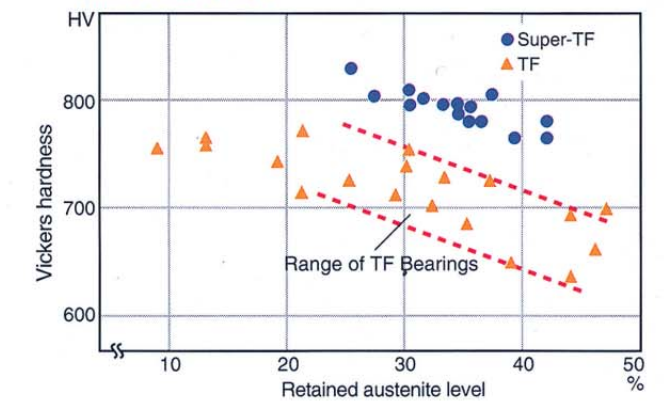


Fig. 9 Change of r/c value under repeated stress

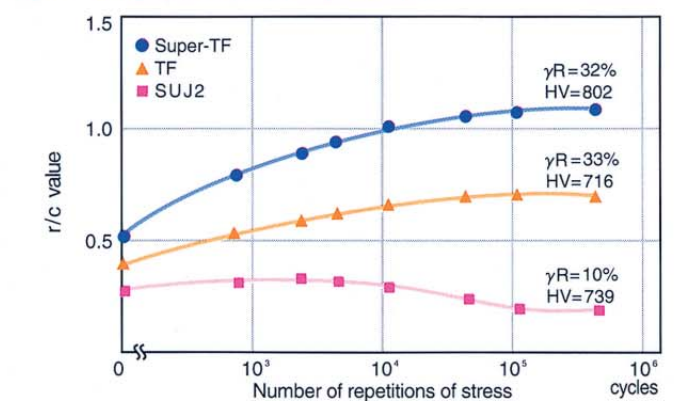

Characteristics of Large Super-TF Bearings

Large Super-TF Bearings not only achieve longer service life under contaminated lubrication, but also offer higher resistance against peeling, wear, seizure and heat. In addition, they also achieve outstanding cost performance.

Service life under contaminated lubrication conditions

Table 1 and Fig. 10 show the results of service life tests conducted under contaminated lubrication conditions with NSK L44649/10 tapered roller bearings. If the service life (L_{10}) of an ordinary carburized steel bearing of this type is taken as 1, then the life of TF and Super-TF Bearings will be respectively 4.5 and 10.2 (Table 1). NSK's Large Super-TF Bearings thus offer over ten times the service life of ordinary carburized steel bearings. Service life is generally affected both by the conditions in which the bearing is used and by the amount of contamination in the lubricant. Under harsh conditions, service life may fall to as little as 1/5 of the catalog life. Large Super-TF Bearings for the first time assure a service life under contaminated lubrication that exceeds the catalog life of existing products (Fig. 11).

Table 1 Comparison of service life of L44649/10 tapered roller bearings

Bearing material	Ordinary carburized steel	TF	Super-TF
Life ratio	1	4.5	10.2

Wear and seizure resistance

Besides extending service life under contaminated lubrication conditions, another goal is to increase the bearing's resistance to wear and seizure by ensuring the dispersion of a large number of fine carbides and nitrides in the bearing material. Fig. 12 presents the results of a Sawin-type wear test, showing the degree of wear and the seizure limit for different types of bearing material. The test reveals that Large Super-TF Bearings have superior wear resistance to both SUJ2 steel and TF Bearings. Super-TF Bearings are also 40% more resistant to seizure than both SUJ2 steel and TF Bearings.

Fig. 10 Service life of L44649/10 bearings under contaminated lubrication

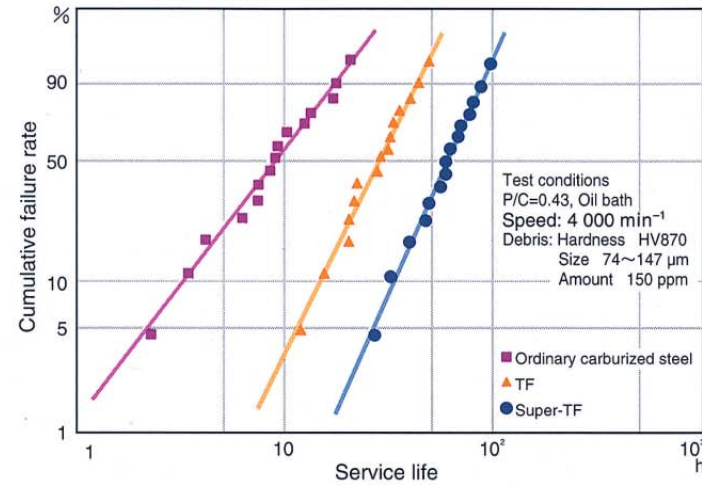


Fig. 11 Comparison of service life under contaminated lubrication


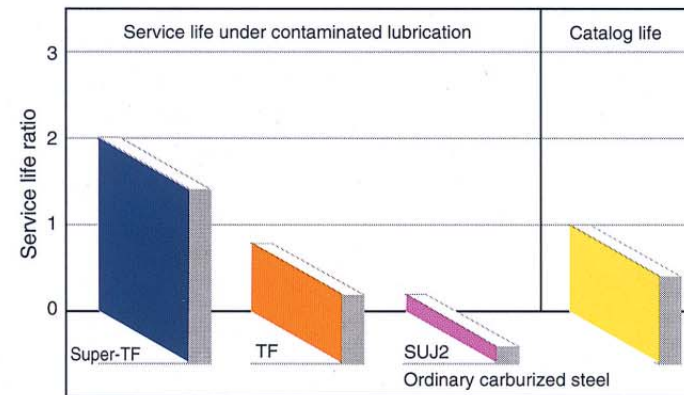


Fig. 12 Comparison of wear resistance

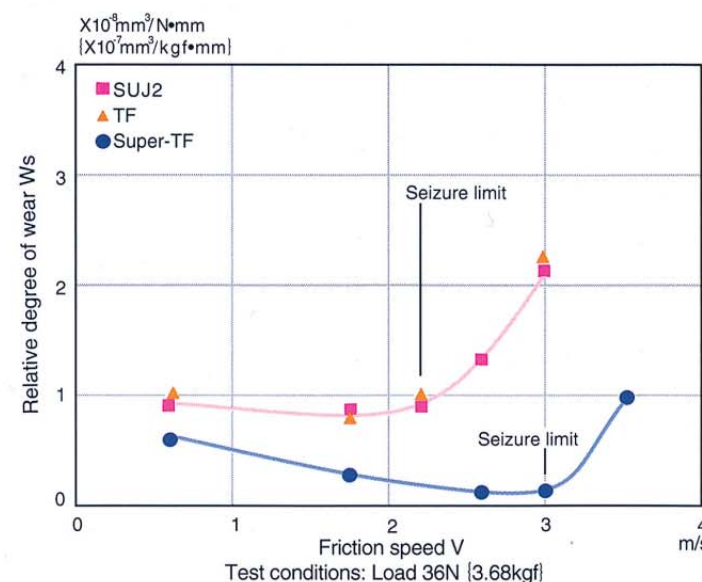

Service life under boundary lubrication conditions

Under boundary lubrication conditions where there is insufficient EHL film, metal surfaces come into direct contact, reducing bearing life. Fig. 13 shows the results of service life tests conducted under conditions where oil film parameter Λ , which represents the ratio of the thickness of the oil film to the roughness of the surface, is very small ($\Lambda=0.3$). When Λ is very small, peeling damage occurs (Fig. 14), but in Super-TF material, the concentration of stress around the projections of the contact area is reduced, giving a service life approximately 5.5 times that of ordinary carburized steel bearings.

Fig. 13 Service life tests with boundary lubrication


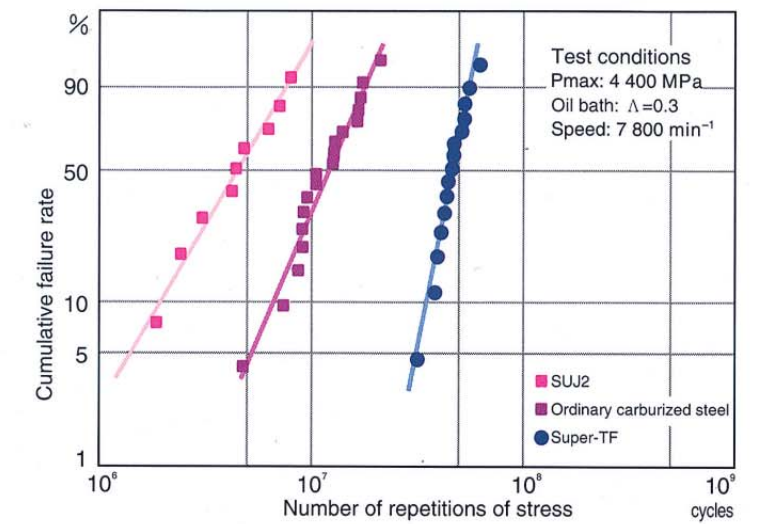



Fig. 14 Peeling damage

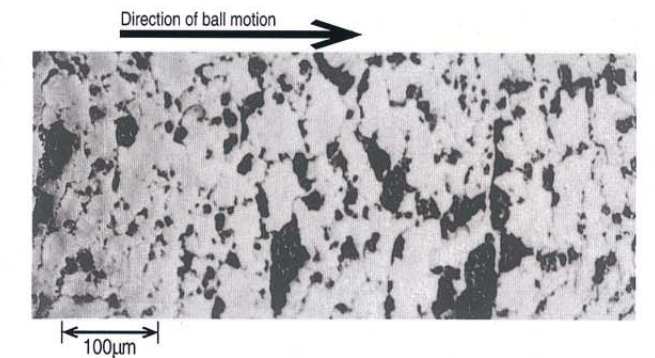

Heat resistance

Fig. 15 shows the results of service life tests conducted with 6206 ball bearings at 160°C under clean lubricating conditions. The results of the test reveal that Super-TF Bearings (heat-resistant specifications) have approximately 4 times the service life of SUJ2X26 steel bearings.

Fig. 15 Service life of 6206 ball bearings at 160°C under clean lubrication

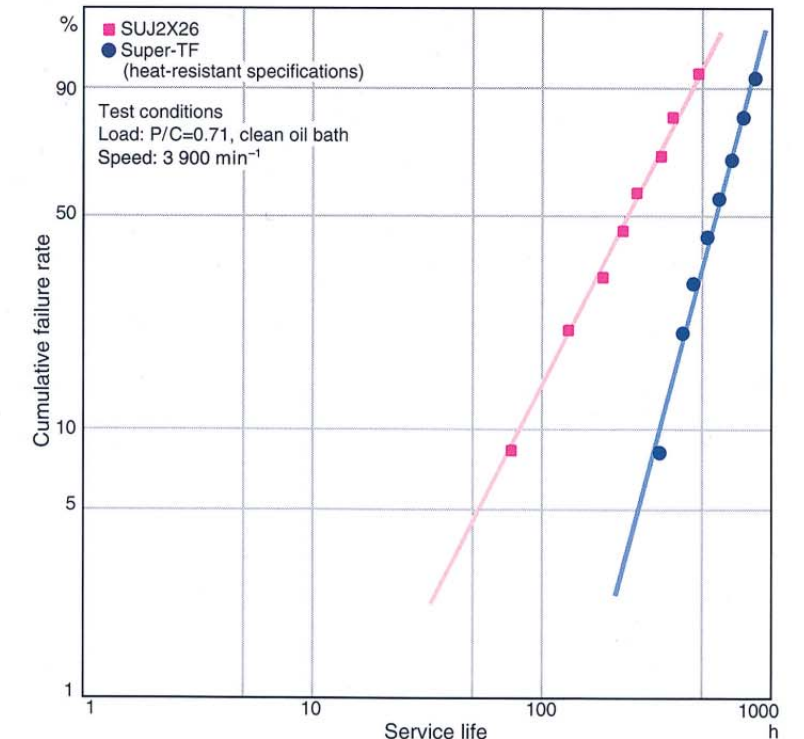

Worldwide Sales Offices

NSK LTD.-HEADQUARTERS, TOKYO, JAPAN INDUSTRIAL MACHINERY BEARINGS DIVISION-HEADQUARTERS AFTERMARKET BUSINESS DIVISION-HEADQUARTERS AUTOMOTIVE BUSINESS DIVISION-HEADQUARTERS PRECISION MACHINERY & PARTS DIVISION-HEADQUARTERS	www.nsk.com tel: 03-3779-7227 tel: 03-3779-8893 tel: 03-3779-7189 tel: 03-3779-7163	PT. NSK INDONESIA Jakarta Korea: NSK KOREA CO., LTD. Seoul Changwon Plant	www.id.nsk.com tel: 021-252-3458 www.kr.nsk.com tel: 02-3287-0300 tel: 055-287-6001	Netherlands: NSK EUROPEAN DISTRIBUTION CENTRE B.V. Tilburg Poland: NSK EUROPE LTD. WARSAW LIAISON OFFICE Warsaw NSK BEARINGS POLSKA S.A. Kielce Plant NSK EUROPEAN TECHNOLOGY CENTER, POLAND OFFICE Kielce NSK STEERING SYSTEMS EUROPE (POLSKA) SP.ZO.O. Walbrzych	tel: 013-4647647 tel: 022-645-1525 tel: 041-366-5001 tel: 041-366-5812 tel: 074-664-4101
Africa South Africa: NSK SOUTH AFRICA (PTY) LTD. Johannesburg	tel: 011-458-3600	Malaysia: NSK BEARINGS (MALAYSIA) SDN BHD Shah Alam NSK MICRO PRECISION (M) SDN. BHD. Malaysia Plant	www.my.nsk.com tel: 03-7803-8859 www.my.nsk.com tel: 03-8961-3960	Spain: NSK SPAIN S.A. Barcelona	tel: 093-433-5775
Asia and Oceania Australia: NSK AUSTRALIA PTY. LTD. Melbourne	www.au.nsk.com tel: 03-9764-8302	New Zealand: NSK NEW ZEALAND LTD. Auckland	www.nsk-rhp.co.nz tel: 09-276-4992	Turkey: NSK RULMANLARI ORTA DOGU TIC. LTD. STI. Istanbul	tel: 0216-355-0398
China: NSK HONG KONG LTD. Hong Kong Shenzhen	tel: 2739-9933 tel: 0755-25904886	Philippines: NSK REPRESENTATIVE OFFICE Manila	tel: 02-759-6246	United Kingdom: NSK BEARINGS EUROPE LTD. Peterlee Plant NSK EUROPEAN TECHNOLOGY CENTRE Newark	tel: 0191-586-6111 tel: 01636-605-123
KUNSHAN NSK CO., LTD. Kunshan Plant	tel: 0512-5771-5654	Singapore: NSK INTERNATIONAL (SINGAPORE) PTE LTD. Singapore NSK SINGAPORE (PRIVATE) LTD. Singapore	tel: 6496-8000 www.nsk-singapore.com.sg tel: 6496-8000	NSK UK Ltd. Newark NSK PRECISION UK LTD. Newark	tel: 01636-605-123 tel: 01636-605-123
CHANGSHU NSK NEEDLE BEARING CO., LTD. Jiangsu Plant	tel: 0512-5230-1111	Taiwan: TAIWAN NSK PRECISION CO., LTD. Taipei TAIWAN NSK TECHNOLOGY CO., LTD. Taipei	tel: 02-2509-3305 tel: 02-2509-3305	NSK STEERING SYSTEMS EUROPE LTD. Maidenhead	tel: 01628-509-800
NSK STEERING SYSTEMS DONGGUAN CO., LTD. Dongguan Plant	tel: 0769-2262-0960	Thailand: NSK BEARINGS (THAILAND) CO., LTD. Bangkok NSK BEARINGS MANUFACTURING (THAILAND) CO., LTD. Chonburi SIAM NSK STEERING SYSTEMS CO., LTD. Chachoengsao NSK ASIA PACIFIC TECHNOLOGY CENTER (THAILAND) CO., LTD. Chonburi	tel: 038-454-010 tel: 038-522-343 tel: 038-454-631	North and South America NSK AMERICAS, INC. (AMERICAN HEADQUARTERS) Ann Arbor Argentina: NSK ARGENTINA SRL Buenos Aires	tel: 734-913-7500 tel: 11-4704-5100
ZHANGJIAGANG NSK PRECISION MACHINERY CO., LTD. Jiangsu Plant	tel: 0512-5867-6496	Vietnam: NSK VIETNAM CO., LTD. Hanoi	tel: 04-955-0159	Brazil: NSK BRASIL LTDA. São Paulo	www.br.nsk.com tel: 011-3269-4786
SUZHOU NSK BEARINGS CO., LTD. Jiangsu Plant	tel: 0512-6665-5666	NSK REPRESENTATIVE OFFICE Ho Chi Minh City	tel: 08-822-7907	Canada: NSK CANADA INC. Toronto	www.ca.nsk.com tel: 905-890-0740
NSK CHINA TECHNOLOGY CENTER Jiangsu	tel: 0512-5771-5654	Europe NSK EUROPE LTD. (EUROPEAN HEADQUARTERS) Maidenhead	www.eu.nsk.com tel: 01628-509-800	Mexico: NSK RODAMIENTOS MEXICANA, S.A. DE C.V. Mexico City	www.mx.nsk.com tel: 55-5390-4312
NSK (SHANGHAI) TRADING CO., LTD. Shanghai	tel: 021-6235-0198	France: NSK FRANCE S.A.S Paris	tel: 01-30-57-39-39	United States of America: NSK CORPORATION Ann Arbor NSK AMERICAN TECHNOLOGY CENTER Ann Arbor	www.us.nsk.com tel: 734-913-7500 tel: 734-913-7500
NSK REPRESENTATIVE OFFICES Beijing Guangzhou Chengdu	www.nsk.com.cn tel: 010-6590-8161 tel: 020-3786-4833 tel: 028-8661-4200	Germany: NSK DEUTSCHLAND GMBH Düsseldorf NSK PRECISION EUROPE GMBH Düsseldorf NEUWEG FERTIGUNG GMBH Munderkingen Plant	tel: 02102-4810 tel: 02102-4810 tel: 07393-540	NSK PRECISION AMERICA, INC. Franklin NSK STEERING SYSTEMS AMERICA, INC. Bennington NSK LATIN AMERICA, INC. Miami	www.npa.nsk.com tel: 317-738-5000 www.nssa.nsk.com tel: 802-442-5448 www.la.nsk.com tel: 305-477-0605
NSK (CHINA) INVESTMENT CO., LTD. Shanghai Changchun	tel: 021-6235-0198 tel: 0431-8898-8682	Italy: NSK ITALIA S.P.A. Milano INDUSTRIA CUSCINETTI S.P.A. Torino Plant	tel: 0299-5191 tel: 011-982-4811		
NSK CHINA SALES CO., LTD. Shanghai	tel: 021-6235-0198				
NSK-WARNER (SHANGHAI) CO., LTD. Plant	tel: 021-3365-5757				
AKS PRECISION BALL (HANGZHOU) CO., LTD. Plant	tel: 0571-2280-1288				
India: RANE NSK STEERING SYSTEMS LTD. Chennai	tel: 044-274-66002				
NSK LTD. INDIA BLANCH OFFICE Chennai Delhi Kolkata Mumbai	tel: 044-2446-6862 tel: 0124-4104-530 tel: 033-4001-2062 tel: 022-2838-7787				
NSK-ABC BEARINGS LTD. Chennai	tel: 044-2466-6862				
Indonesia: PT. NSK BEARINGS MANUFACTURING INDONESIA Jakarta Plant	tel: 021-898-0155				

NSK Ltd. has a basic policy not to export any products or technology designated as controlled items by export-related laws. When exporting the products in this brochure, the laws of the exporting country must be observed. Specifications are subject to change without notice and without any obligation on the part of the manufacturer. Every care has been taken to ensure the accuracy of the data contained in this brochure, but no liability can be accepted for any loss or damage suffered through errors or omissions. We will gratefully acknowledge any additions or corrections.

For more information about NSK products, please contact: _____